
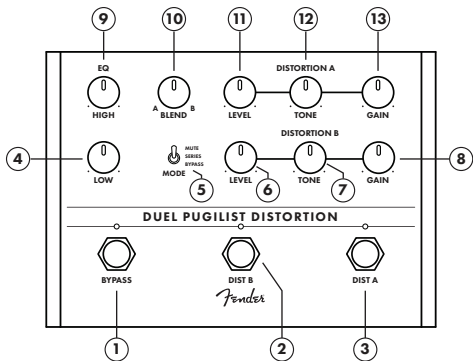


Fender

DUEL PUGILIST DISTORTION

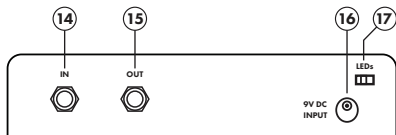

- | | |
|--------------------------------|--------------------------|
| 1. Bypass Footswitch/LED | 9. High EQ |
| 2. Distortion A Footswitch/LED | 10. Blend |
| 3. Distortion B Footswitch/LED | 11. Level (Distortion A) |
| 4. Low EQ | 12. Tone (Distortion A) |
| 5. Mode Switch | 13. Gain (Distortion A) |
| 6. Level (Distortion B) | 14. Input Jack |
| 7. Tone (Distortion B) | 15. Output Jack |
| 8. Gain (Distortion B) | 16. DC Power Connector |
| | 17. LED Kill Switch |

The Fender logo is written in its signature script font, featuring a stylized 'F' and a registered trademark symbol.

DUEL PUGILIST DISTORTION

Step into the ring with this one-two punch distortion pedal. The Duel Pugilist Distortion features the same distortion voicings found in our popular Pugilist pedal, but with new combinations designed to deliver a knockout. It offers three operating modes: Series, Mute and Parallel. Series mode lets you stack both distortions as you would two separate pedals. Bypass mode lets you blend two different distortions, or a clean sound with a distorted sound. Mute mode offers one distortion to create your main tone, with an additional distortion layered on top for added richness and complexity.

Designed by our in-house team of experts, the Duel Pugilist Distortion is an all-original Fender circuit. The chassis is crafted from lightweight, durable anodized aluminum, and the LED-backlit knobs easily show your control settings at a glance on dark stages.

DESIGNED IN CALIFORNIA, U.S.A.

Bypass Footswitch/LED

Engages or bypasses effect. LED illuminates when effect is on.

Distortion A and B Footswitches/LEDs

These footswitches work in conjunction with the MODE switch. When MODE is set to Series or Bypass, footswitch will bypass each distortion effect. LED illuminates when distortion is on. When MODE is set to Mute, footswitch mutes output of distortion circuit.

High/Low EQ

These controls adjust overall pedal equalization and are active in all modes, except when pedal is bypassed.

Mode Switch

Selects among Series, Parallel and Mute modes.

Level (Distortion B)

Adjusts output level of Distortion B circuit.

Tone (Distortion B)

Adjusts brightness of Distortion B circuit.

Gain (Distortion B)

Adjusts sustain or drive for Distortion B circuit.

Blend

This control works in the Parallel and Mute modes and adjusts balance between the two distortion circuits. Control is disabled in Series mode.

Level (Distortion A)

Adjusts output level of Distortion A circuit.

Tone (Distortion A)

Adjusts brightness of Distortion A circuit.

Gain (Distortion A)

Adjusts sustain or drive for Distortion A circuit.

Input Jack

High-impedance input suitable for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

Output Jack

Low-impedance output jack connects to amp or to next effect pedal in signal chain.

DC Power Connector

Standard center-negative 9VDC jack for use with appropriate power supplies.

LED Kill Switch

Deactivates control-knob illumination.

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIFORNIA, U.S.A.

Fender® is a registered trademark of FMIC.
Copyright © 2020 FMIC. All rights reserved.

PN 7720603000 REV. A

IMPORTANT SAFETY INSTRUCTIONS

- **WARNING:** To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- **WARNING:** The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug AC power adapter before cleaning unit exterior. Use only a damp cloth for cleaning; wait until unit is completely dry before reconnecting to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels, which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at
www.fender.com/support

SPECIFICATIONS

IMPEDANCES POWER SUPPLY

Input: 820K Ω Output: 470 Ω
9VDC regulated adapter,
5.5 x 2.1 mm barrel connector, center negative
165mA @ 9VDC $\text{+} \text{---} \text{---} \text{---}$

POWER REQUIREMENTS

DIMENSIONS WEIGHT

6.69" x 4.84" x 1.77" (170mm x 123mm x 45mm)
2.25 lbs. (1.02kg)



Product specifications subject to change without notice



NOTES

Fender®

© FENDER MUSICAL INSTRUMENTS 2020

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。

注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。