

MOOER

REPEATER

Digital Delay Pedal

Owner's Manual**Precautions****PLEASE READ CAREFULLY BEFORE PROCEEDING****Power Supply**

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V (+/-10%) DC, center minus. The maximum working voltage shall not exceed 12V, otherwise may be dangerous equipment damage, fire or other problems.

Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will help prevent malfunction and / or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper, metallic, or other objects into this unit.

Take care not to drop the unit, and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth.

Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Heat sources
- Magnetic fields
- Extreme temperature or humidity
- Excessive dusty or dirty location
- High humidity or moisture
- Strong vibrations or shocks

Main Features


- 3 Working Modes: Mod/Normal/Kill Dry
- Kill Dry function for using in the parallel FX loop
- Full metal shell
- Very small and exquisite
- True bypass
- DC 9V Adapter power supply

Effects Explanation

Mod: Add chorus to the delay sound, nice spacy feeling.

Normal: Basic clean delay effects, natural and clear.

Kill Dry: Cut the dry signal, only output the wet signal, very useful when in a parallel FX loop.

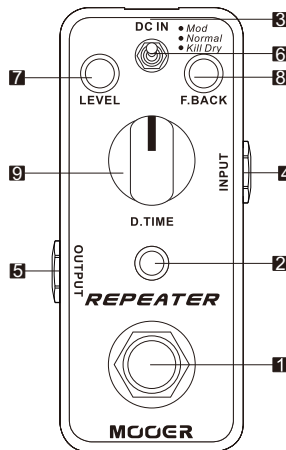Panel Instruction**1. TRUE BYPASS Footswitch:**

Push down the footswitch to switch between effects and bypass status.

2. ON/OFF LED:

Instructs effects or bypass status of REPEATER, when the LED is lit up, the effects is on.

3. DC IN Power Jack:

For power supply, use a 9-volt DC regulated AC adapter (plug polarity is positive on the barrel and negative in the center).

4. INPUT Jack:

1/4" mono audio jack, for connecting guitar.

5. OUTPUT Jack:

1/4" mono audio jack, outputs the signal.

6. Mode Switch:

Switch between Mod mode, Normal mode, and Kill Dry mode.

7. LEVEL Knob: Adjust the level of delay effects.

8. F.BACK Knob: Adjust the feedback of delay effects.

9. D.TIME Knob: Adjust the delay time.

Specification

Delay Time: 25ms~1000ms

Input: 1/4" monaural jack (impedance: 470k Ohms)

Output: 1/4" monaural jack (impedance: 100 Ohms)

Power Requirements: AC adapter 9V DC (center minus plug)

Current Draw: 128 mA

Dimensions: 93.5mm (D) x 42mm (W) x 52mm (H)

Weight: 160g

Accessories: Owner's Manual

* Disclaimer: Any specification's update won't be amended in this manual.

MOUER

REPEATER

数字延迟单块

用户手册

注意事项

使用前请仔细阅读

电源供应

请使用正确的交流电源插座连接电源变压器。
 请使用内负外正的9V(+/-10%)电源变压器，最大工作电压不得超过12V，否则将会导致设备损坏，着火或者其他问题。
 不使用时或雷雨天时请拔下电源。

连接

连接设备或断开连接前，请务必关闭电源及其它设备，这将有助于避免故障和损坏其它设备。另外，要确保移动本机前断开所有的连接线和电源线。

放置场所

为防止变形、变色，及其它严重损坏，请避免以下情况：

- 阳光直射
- 磁场
- 多尘或不洁的地方
- 强烈震动或摇晃
- 热源
- 高温潮湿
- 湿度较大

电音干扰

在使用本机时，收音机和电视机可能会造成干扰。使用本机时要远离收音机和电视机。

清洁

请用干燥柔软的布清洁本机。如有必要，可用稍微湿润的布。切勿使用粗糙的清洁粉、酒精、涂料稀释剂、蜡、溶剂、清洁剂及化学试剂等浸渍抹布。

操作

请勿用蛮力使用开关及控制元件。
 请勿让纸屑、金属制品及其它物体落入机内。
 注意不要掉落，不要使其受到冲击及过度压力。


性能概述

- 三种工作模式：Mod/Normal/Kill Dry
- Kill Dry模式可以方便的在并联效果回路中使用
- 全金属外壳
- 外观小巧精致
- 纯直通设计
- 9V电源供电

模式说明

- Mod:** 在延迟效果中加入合唱音色，具有很好的空间感。
Normal: 常规的延迟效果，自然而清晰的音色。
Kill Dry: 只输出延迟效果音，不输出原始信号，非常适合在并联效果回路中使用。

面板说明

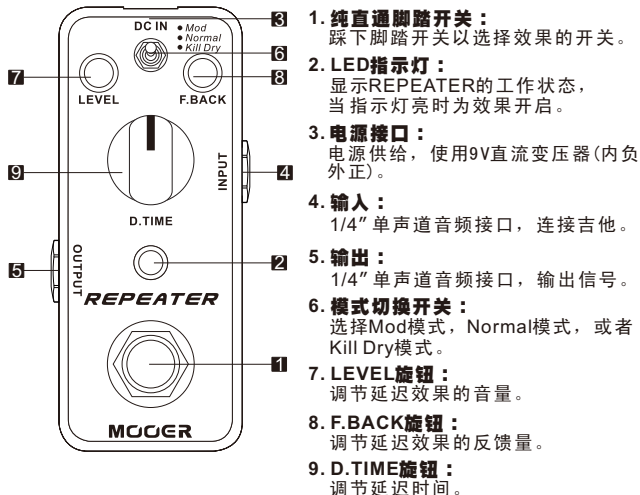

技术参数

延迟时间：25毫秒~1000毫秒

输入：1/4"单声道音频接口(阻抗：470k Ohms)

输出：1/4"单声道音频接口(阻抗：100 Ohms)

电源供给：9V直流变压器(内负外正)

工作电流：128 mA

尺寸：93.5mm (D) × 42mm (W) × 52mm (H)

重量：160g

附件：用户手册

*免责声明：参数更新恕不另行通知。